


SmartRack® High-Capacity Vertical Cable Manager

Models:
SRCABLEVRTL
SRCABLEVRTS



Purchased product
may differ from image.

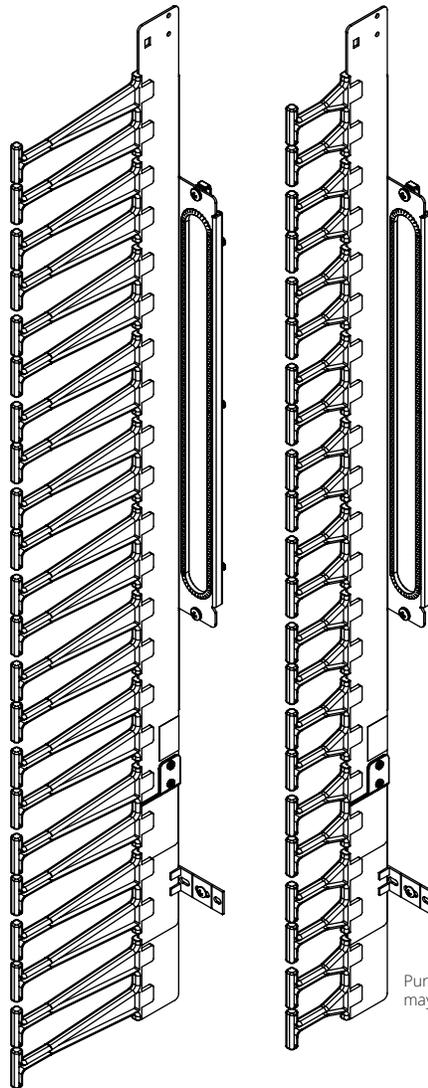

Powering Business Worldwide

PRODUCT REGISTRATION


Register your product today for a
chance to win an ISOBAR® surge
protector in our monthly drawing!

[Tripplite.Eaton.com/warranty](https://www.tripplite.com/warranty)




Parts List

SRCABLEVRTS

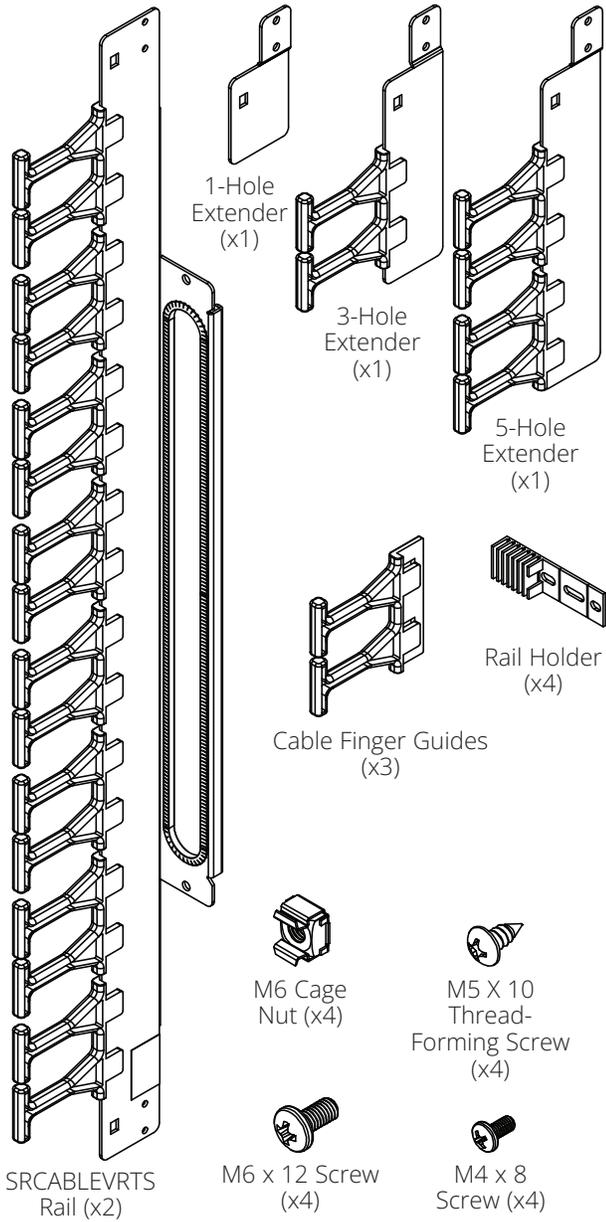


SRCABLEVRTL

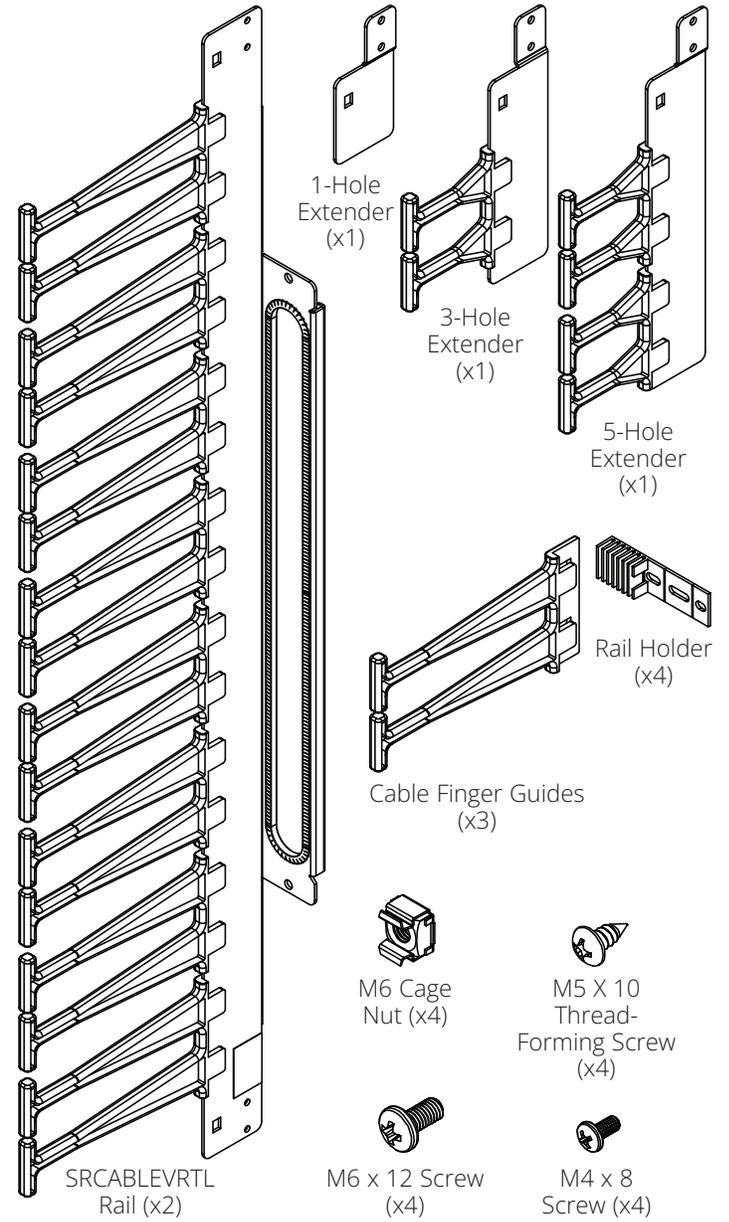


Installation

- 1 Remove (or do not install) the blanking plates that were included with the rack.

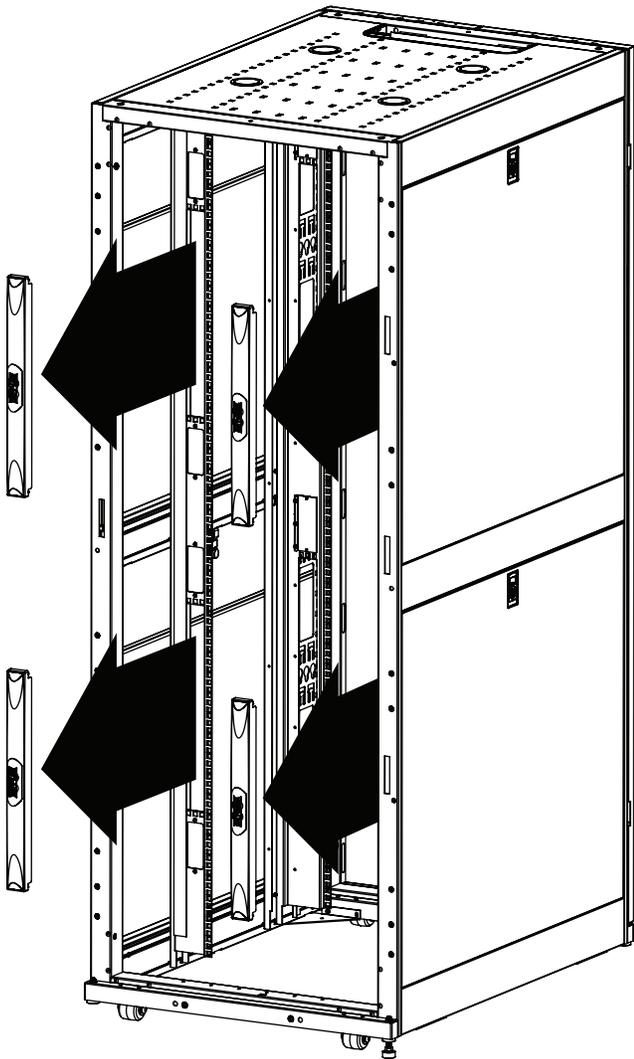


- 2 Once the blanking plates are removed, insert the included cage nuts in the holes on the ends of the 1U rail openings.

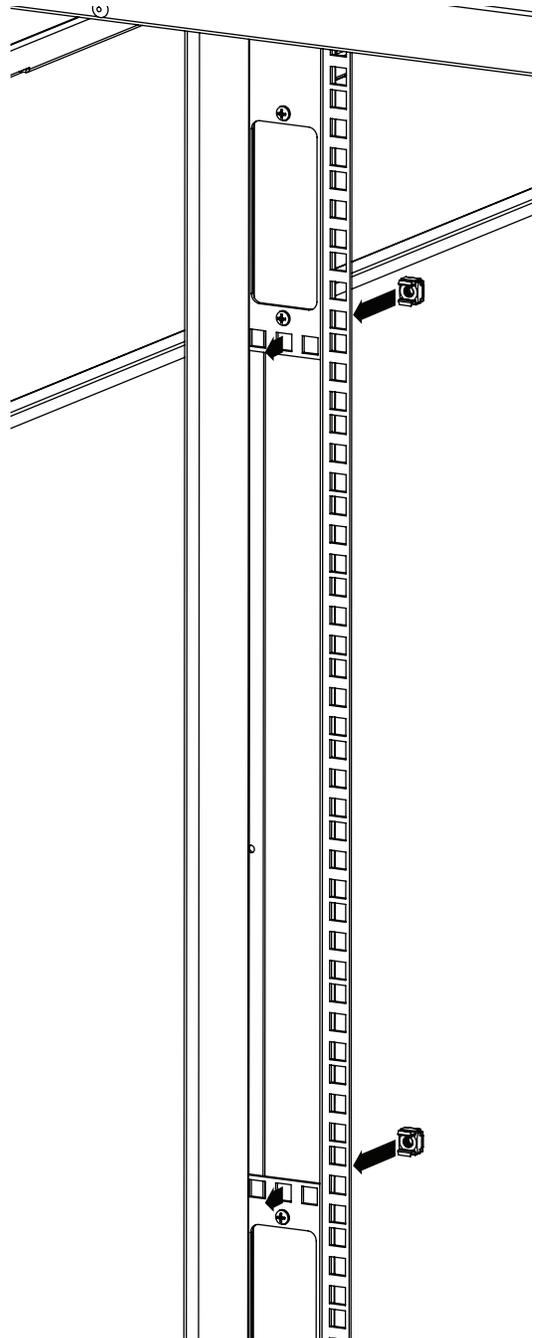


Installation

- 3 Align the rail assembly with the cage nuts and secure using the included M6 screws.

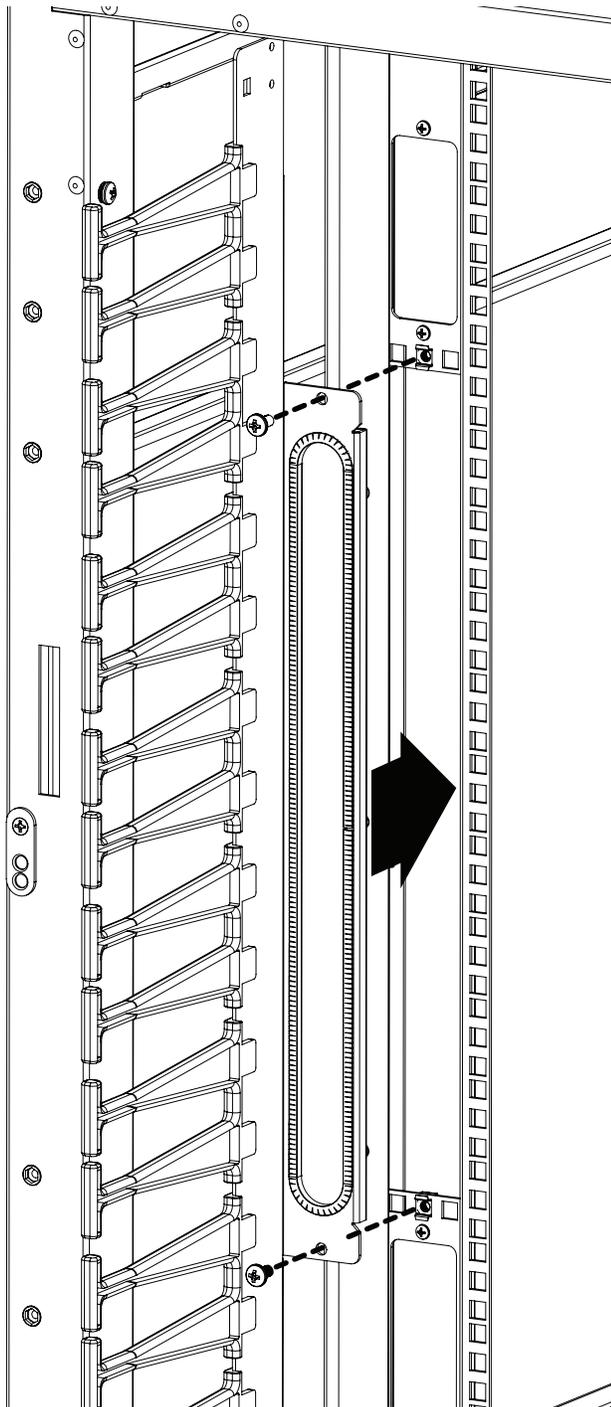


- 5 Connect the assemblies to the rails by attaching a cable finger guide in the center.

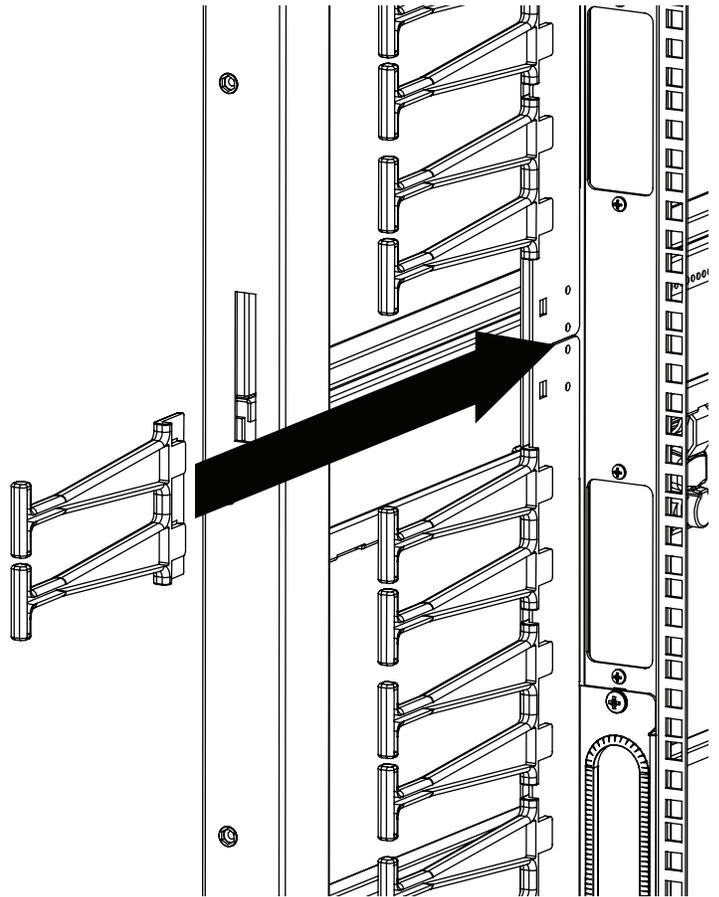


- 4 Repeat steps 1-3 for the second assembly.

Installation


- 6 Once you approach the ends of the SRCABLEVRTS/L rail, determine which size extender to use in your installation (1, 3 or 5 hole). Align the holes of the extender with those on the end of the rail **A** and secure using two M4 x 8 screws **B**.

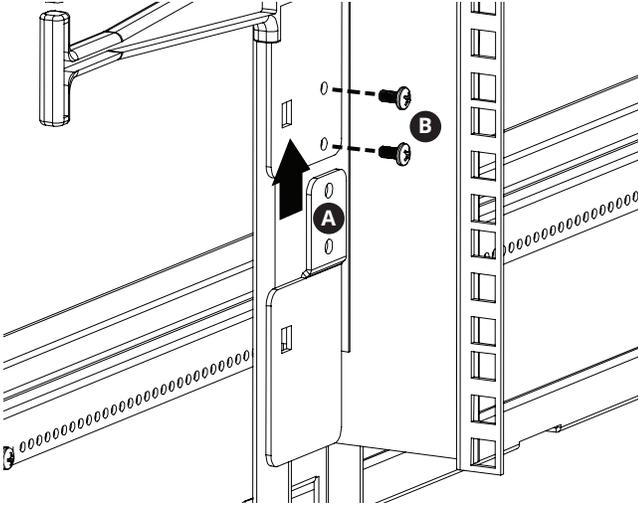

- 7 Connect the extenders to the rails by attaching a cable finger guide in the center.

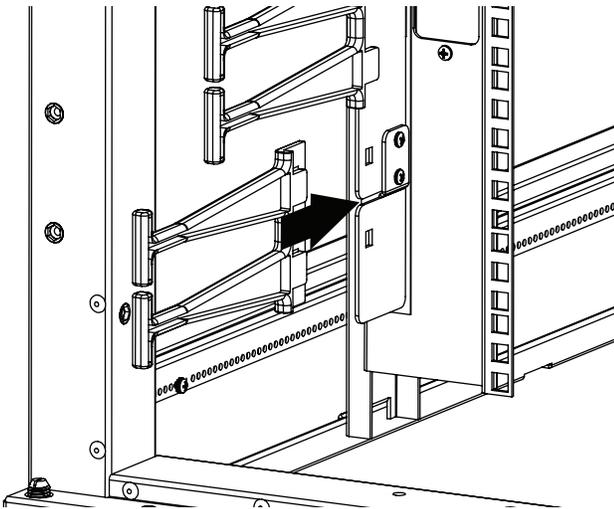


- 8 For added support, align the rail holder brackets on the top and bottom of the rail assembly and secure to the racking using the included M5 X 10 thread-forming screws.

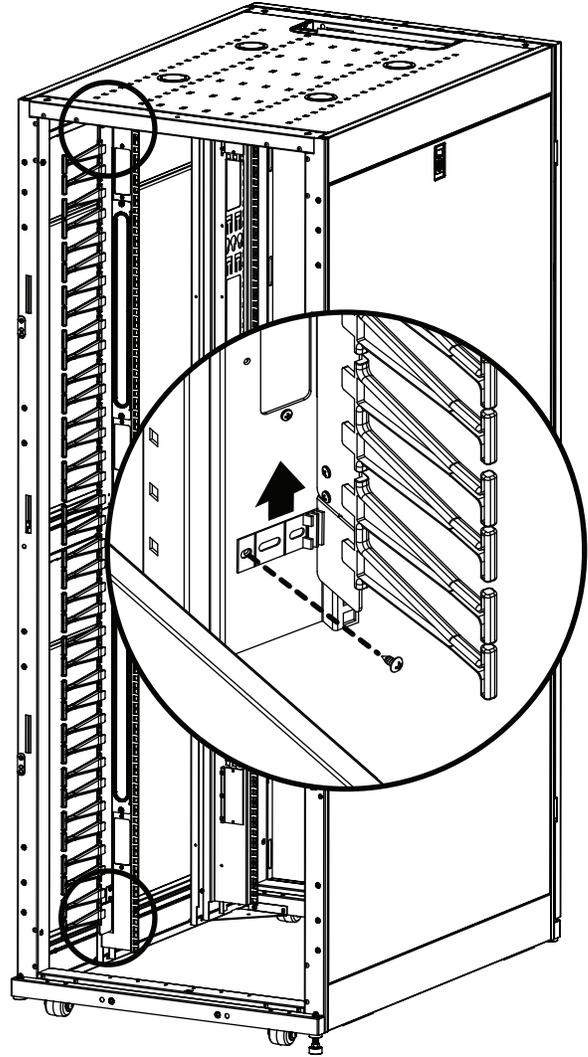

Installation

The cable managers can be installed in 2 different orientations, with the Cable Finger Guides on the inside of the cable bushings **A** or on the outside of the cable bushings **B**.

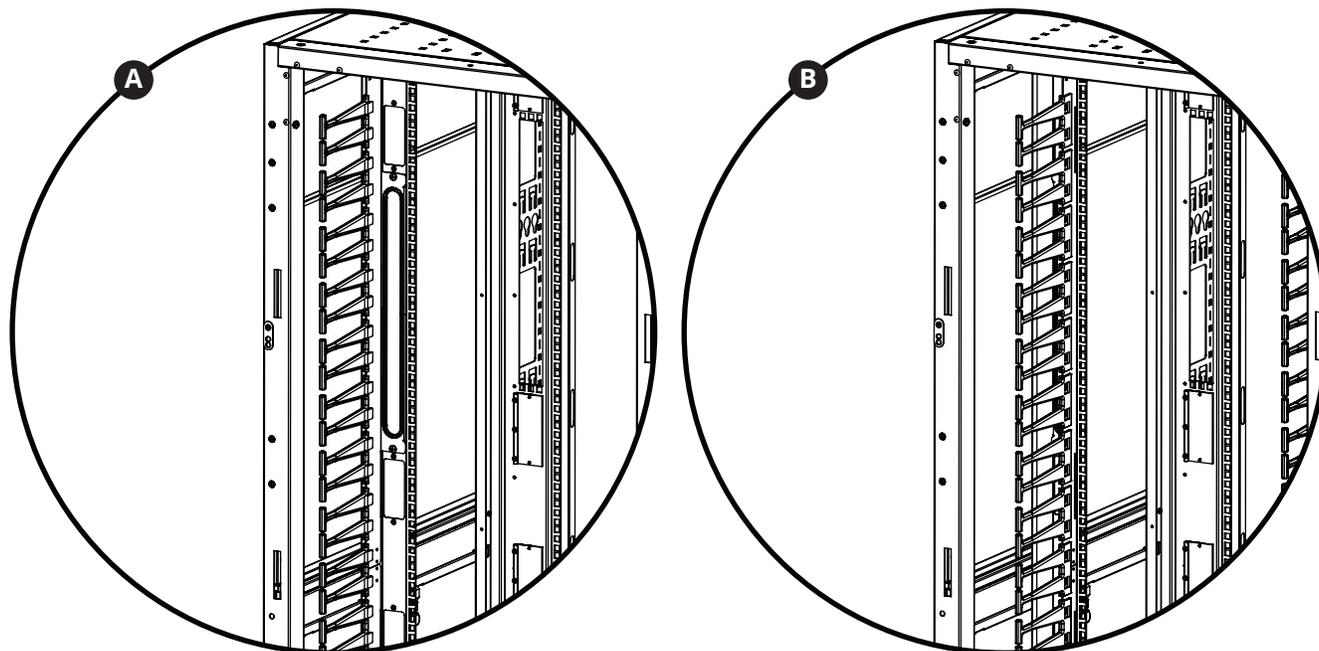

Use the table to determine the configuration that best fits your rack.

Rack Size		Top of SRCABLEVRT	Bottom of SRCABLEVRT
42U	750 mm Wide	-	1-Hole Extender (x1)
	800 mm Wide	-	1-Hole Extender (x1)
45U	750 mm Wide	3-Hole Extender (x1)	1-Hole Extender (x1)
	800 mm Wide	3-Hole Extender (x1)	1-Hole Extender (x1)
48U	750 mm Wide	5-Hole Extender (x1)	1-Hole Extender (x1)
	800 mm Wide	3-Hole Extender (x1)	5-Hole Extender (x1)

Warranty and Product Registration

5-Year Limited Warranty

We warrant our products to be free from defects in materials and workmanship for a period of five (5) years from the date of initial purchase. Our obligation under this warranty is limited to repairing or replacing (at its sole option) any such defective products. Visit Tripplite.Eaton.com/support/product-returns before sending any equipment back for repair. This warranty does not apply to equipment which has been damaged by accident, negligence or misapplication or has been altered or modified in any way.

EXCEPT AS PROVIDED HEREIN, WE MAKE NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Some states do not permit limitation or exclusion of implied warranties; therefore, the aforesaid limitation(s) or exclusion(s) may not apply to the purchaser.

EXCEPT AS PROVIDED ABOVE, IN NO EVENT WILL WE BE LIABLE FOR DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OF THIS PRODUCT, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE. Specifically, we are not liable for any costs, such as lost profits or revenue, loss of equipment, loss of use of equipment, loss of software, loss of data, costs of substitutes, claims by third parties, or otherwise.

Product Registration

Visit Tripplite.Eaton.com/warranty today to register your new product. You'll be automatically entered into a drawing for a chance to win a FREE Eaton Tripp Lite series product!*

* No purchase necessary. Void where prohibited. Some restrictions apply. See website for details.

WEEE Compliance Information for Customers and Recyclers (European Union)



Under the Waste Electrical and Electronic Equipment (WEEE) Directive and implementing regulations, when customers buy new electrical and electronic equipment from Eaton, they are entitled to:

- Send old equipment for recycling on a one-for-one, like-for-like basis (this varies depending on the country)
- Send the new equipment back for recycling when this ultimately becomes waste

Eaton has a policy of continuous improvement. Specifications are subject to change without notice.



Powering Business Worldwide

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

© 2024 Eaton
All Rights Reserved
Publication No. 24-07-091 / 93-4AE8_RevA
August 2024

Eaton is a registered trademark.

All trademarks are property
of their respective owners.